

NEC MultiSync® V321

Objednáací kód: 60002914, 60003004 (BK)

NEC LCD 32" Public Display

NEC MultiSync® V-Series Public Displays. This product line represents a solution for customers looking for good value for money with high expectations in reliability and longevity. A LAN interface for monitoring and controlling along with an HDMI interface makes this a feature rich value product.

An ideal solution for retail signage, meeting rooms, video conferencing and other non 24/7 applications.



POSKYTOVÁNÍ SKUTEČNÝCH VÝHOD

Digital Signage - made easy with NEC Digital Signage Software.

Latest Interface Standards - to make sure even new signals or interfaces can be used.

NEC Public Displays - designed to meet your environmental requirements by minimizing power consumption and waste.

V-Series Products - designed to last and offer trouble-free operation. Control and monitoring features are best-in-class.


Well structured OSD and intuitive Controls - reduce installation cost and therefore overall total cost of ownership (TCO).

Ease of Installation and Operation - free LAN control software for central, convenient and cost-efficient maintenance and control. Automatic alarm emails notify the user of problems if they should occur.



VYNIKAJÍCÍ VÝKON

- **HDMI** along with a LAN interface for screen control are unique in this combination in a Public Display and secure future proofness.
- **With efficient Product Design and High Quality Components** power consumption is minimized. Feet are optional and the user manual is available on CD to minimize waste.
- **Free Digital Signage Software.** MultiSync® V-Series comes with a digital signage available for free download.
- **OSD.** Information on the inside temperature through OSD and extensive user fan control are unique and secure unparalleled reliability. The displays can send alarm emails via free NEC LAN software in the unlikely event of a problem.

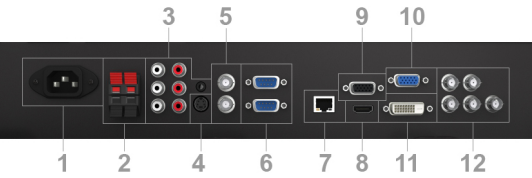

- 1. Power (AC in)
- 2. External speaker
- 3. Audio in / out
- 4. S- Video in
- 5. Video in / out Composite
- 6. External Control RS-232 in / out
- 7. LAN (RJ-45)
- 8. HDMI
- 9. RGB out
- 10. RGB in
- 11. DVI in (DVI-D)
- 12. RGB / HV in Component

SPECIÁLNÍ CHARAKTERISTIKA

Ochrana proti přehřátí s ovladatelnými ventilátory, Protective glass ready, Temperature sensors readable via OSD



Ecological Materials Optional feet

Ecological Standards Energy Star 5.0; EuP compliant

TECHNICKÁ SPECIFIKACE NEC MultiSync® V321	
DISPLAY	
Technologie panelu	S-PVA
Aktivní plocha obrazovky (W x H) [mm]	697.7 x 392.3
Velikost obrazovky [palce/cm]	31.5 / 80
Rozteč bodů [mm]	0.511
Jas (typ.) [cd/m²]	450
Kontrastní poměr (typ.)	3000:1
Pozorovací úhly [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Barvy [mil.]	16.77
Doba odezvy (typ.) [ms]	8 (grey-to-grey)
SYNCHRONISATION RATE	
Horizontální frekvence [kHz]	31.5 - 91.1 (analog and digital)
Vertikální frekvence [Hz]	50 - 85
RESOLUTION	
Nativní rozlišení	1366 x 768 at 60 Hz
Podpora na digitálním a analogovém výstupu (PC)	1366 x 768; 640 x 480; 720 x 400; 800 x 600; 832 x 624
CONNECTIVITY	
Analogový video vstup	1 x D-sub 15 pin; 1 x S-Video; Component (BNC); Composite (BNC); RGBHV (BNC)
Digitální video vstup	1 x DVI-D (with HDCP); 1 x HDMI
Analogový audio vstup	2 x Cinch (RCA); 1 x 3,5 mm jack
Analogový video výstup	1 x D-sub 15 pin; 1 x BNC composite out
Dálkové ovládání	LAN; RS-232C (9-pin D-sub) Input and Output; D-sub 15 and DVI-D (DDC/Ci); IR dálkové ovládání
ELECTRICAL	
Spotřeba energie v módu [W]	75 (typ.); 125 (max.)
Power Savings Mode [W]	< 2
Power Management	VESA DPMS
Power Requirements	100-120 V/220-240 V; 1.4 A/0.6 A; internal power supply
ENVIRONMENTAL CONDITIONS	
Operating Temperature [°C]	Operation Temperature: +5 to +40 Landscape +5 to +35 Portrait
Operating Humidity [%]	20 to 80
MECHANICAL	
Rozměry (W x H x D) [mm]	bez podstavce: 789 x 476,3 x 133
Hmotnost [kg]	Without stand: 14.3
Tloušťka rámečku [mm]	44.2 (left and right); 40.5 (top and bottom)
VESA montáž [mm]	400 x 200 (FDMI); 12 holes / 100 mm spacing
AVAILABLE OPTIONS	
Montáž na zeď	Optional: PDW 32-70 L
Stojan	volitelně
ADDITIONAL FEATURES	
Barevné provedení	Black Front Bezel, Black Back Cabinet
Bezpečnost a ergonomie	CE; EuP; TÜV GS; C-tick; Energy Star 5.0; FCC Class B; UL/C-UL or CSA; CCC; PSB; VCCI; RoHS
Plug & Play	VESA DDC2B
Audio funkce	Volitelné reproduktory (7 W + 7 W)
Obsah balení	Display; Power Cable; Dálkové ovládání (IR); CD-ROM (Uživatelský manuál/manuály) Signální kabel: VGA - VGA
Záruka	3 years warranty incl. backlight
TV AND VIDEO	
Podporované TV standardy (bez tuneru)	NTSC; PAL; SECAM
Video režimy (bez tuneru)	480i; 480p; 576i; 576p; 2 x720p (50 and 60 Hz); 2 x 1080i (50 and 60 Hz)